

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)


PCT

(10) International Publication Number  
**WO 2005/044680 A1**

- (51) International Patent Classification<sup>7</sup>: **B65D 19/36** (74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).
- (21) International Application Number:  
PCT/SE2004/001599 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date:  
4 November 2004 (04.11.2004) (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0302921-2 5 November 2003 (05.11.2003) SE
- (71) Applicant (for all designated States except US): **INTER IKEA SYSTEMS B.V.** [NL/NL]; Olof Palmestraat 1, NL-2616 LN Delft (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LARSSON, Peter** [SE/SE]; Östergatan 34, S-343 32 Älmhult (SE). **RASMUSSEN, Tobias** [SE/SE]; Möllebacksgatan 8, S-254 41 Helsingborg (SE).

[Continued on next page]

(54) Title: **FIXTURE WITH MEANS TO ADAPT THE POSITIONS OF LOADING LEDGES**

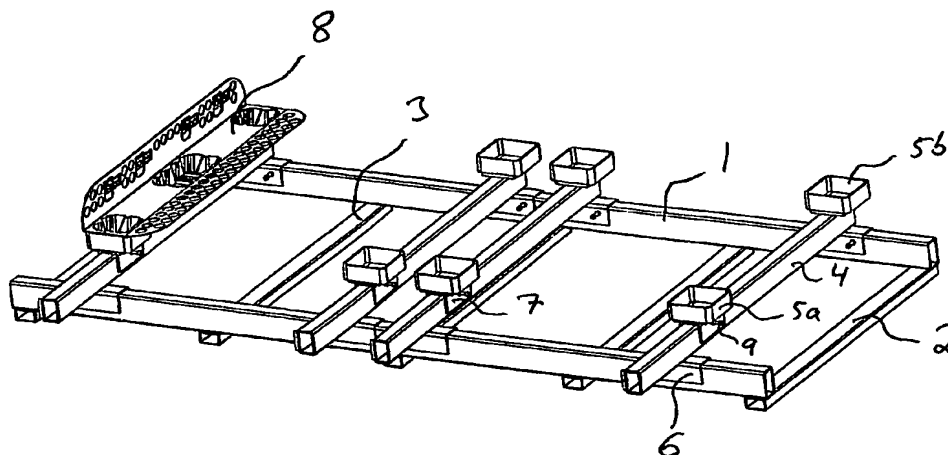

(57) Abstract: The present invention concerns a fixture to be used for formation of unit loads of one or more packages (12) on loading ledges (8). The fixture has means to adapt the positions of the loading ledges (8) depending on the size and form of the unit loads to be formed. The fixture has a rectangular frame formed of two parallel long struts (1) and two short struts (2) between the ends of the long struts (1). A number of further intermediate short struts (2) may be arranged between the long struts (1) to stabilise the frame. Four transversal bars (4) are arranged moveable on the long struts (1). On each transversal bar (4) two cups (5a, 5b) are received, of which at least one cup (5a) is received moveable on the transversal bar (4). The cups (5a, 5b) are to receive loading ledges (8).



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*